

### Features

#### Specifications

Bronze Sleeve Packed Water Level Gauge, Automatic Shut-Off Device in the Water Arm

#### End Connections

Flanged Ends to BS10 Table 'H'

#### Test Pressures

Max. B.O.P. 17.58 Kg/cm<sup>2</sup>  
Hydraulic Test Pressure 35.16 Kg/cm<sup>2</sup>


Max. Working Temperature 225°C



### Suitability




### Material Combination

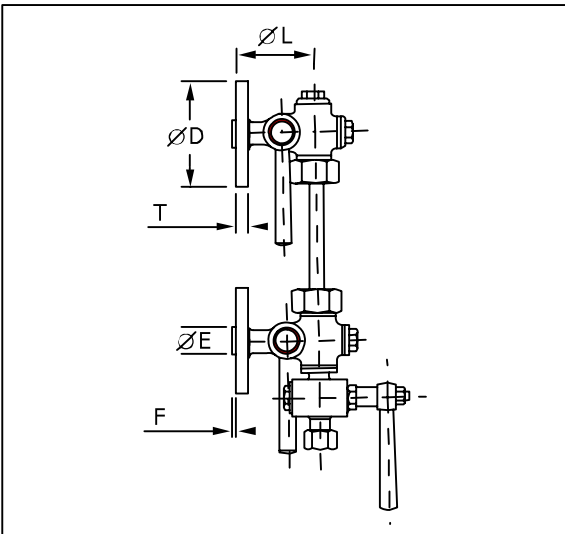

P/No.	Name of Part	Material	Specifications
1	Plug	Bronze	IBR 282 [a] [iv] Gr.B
2	Gasket	C.A.F	IS : 2712 Gr.W/1
3	Upper Arm	Bronze	IBR 282 [a] [iv] Gr.B
4	Cone	Rubber	-
5	Nut & Washer	Bronze	IBR 282 [a] [iv] Gr.B
6	Glass Tube	Glass	-
7	Lower Arm	Bronze	IBR 282 [a] [iv] Gr.B
8	Ball	S.S.	AISI-304
9	Sleeve	Moulded Asbestos	-
10	Stem	S.S	AISI-410
11	Drain Valve	Bronze	IBR 282 [a] [iv] Gr.B
12	Nipple	Brass	-
13	Bonnet	Bronze	IBR 282 [a] [iv] Gr.B
14	Handle	Bronze	IBR 282 [a] [iv] Gr.B

### Dimensional Data

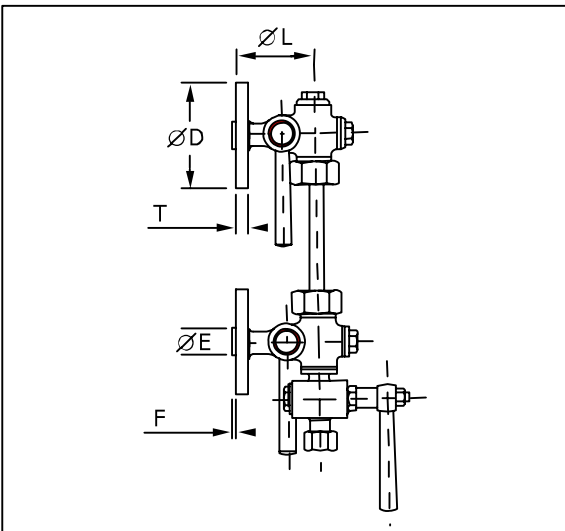

Nominal Size	Length	Ø D	T	Ø E	F
15	82	4.1/2	3/8	19	3
20	95	4.1/2	3/8	25.4	3