



Features

Specifications

Screwed in Bonnet, Inside Screw, Rising Stem, Renewable S.S. Trim with Backseat arrangement, Handwheel operated.

End Connections

Screwed female BSP/NPT Threads

Test Pressures

Body - 30 bar Hyd.

Seat - 22 bar Hyd.

Saturated Steam - 150 Psig.



Suitability

Water



Steam



Gas




Oil



Air




Material Combination

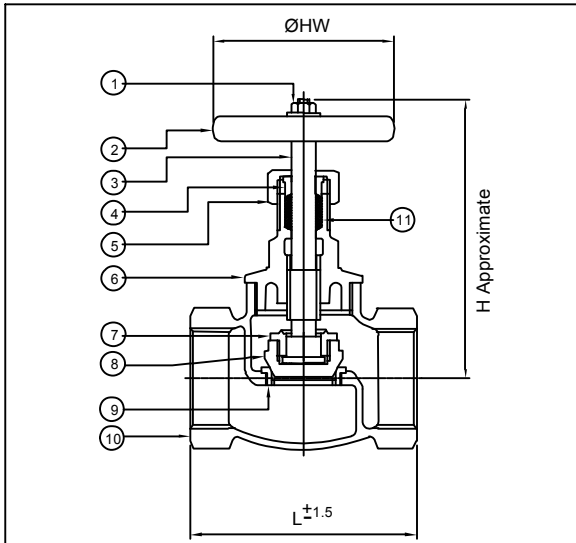

P/No.	Name of Part	Material	Specifications
1	Nut	Steel	-
2	Handwheel	Aluminium	-
3	Stem	S.S.	AISI 410
4	Gland	Brass / Bronze	BS 2874 / BS 1400 LG2
5	Gland Nut	Bronze	BS 1400 LG2
6	Bonnet	Bronze	BS 1400 LG2
7	Disc Nut	Brass / Bronze	BS 2874 / BS 1400 LG2
8	Disc	S.S.	AISI 410
9	Body Seat Ring	S.S.	AISI 410
10	Body	Bronze	BS 1400 LG2
11	Gland Packing	PTFE	-

Dimensional Data (in mm)

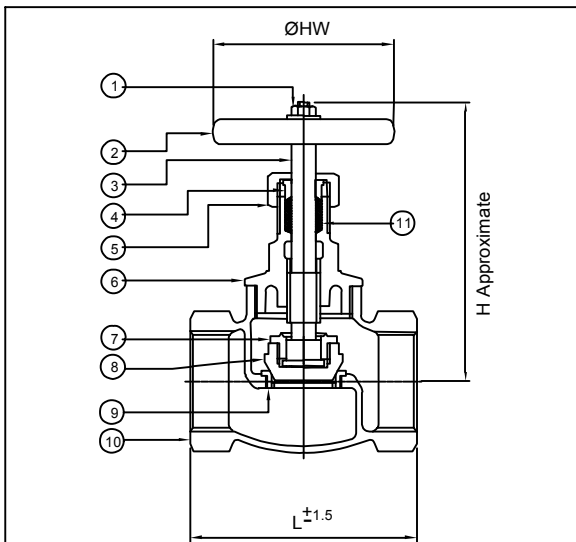

Nominal Size	L	H	HW
15	57	102	49
20	67	118	67
25	68	130	67