

Features

Specifications

Bronze Angle Globe Valve, Right Angle Pattern, Screwed in bonnet, Inside Screw, Rising Stem with Renewable Ring and Integral Seat, Handwheel Operated.

End Connections

Screwed Female BSP Parallel Threads to BS21

Test Pressures

Body - 30 bar Hyd.


Seat - 22 bar Hyd.



Suitability




Material Combination

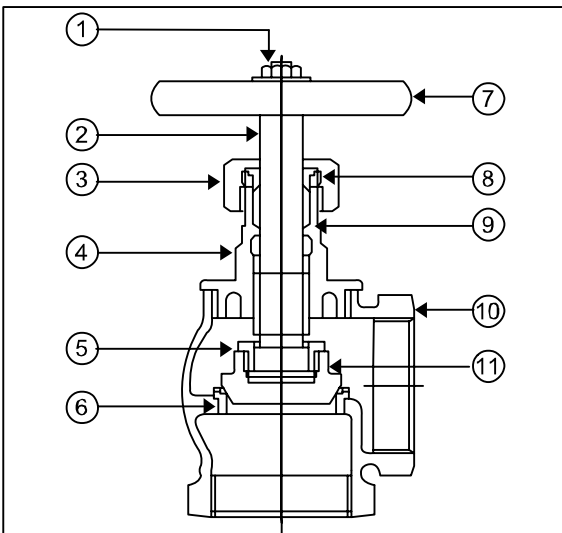

P/No.	Name of Part	Material	Specifications
1	Nut	M.S.	-
2	Stem	S.S.	AISI 410
3	Gland Nut	Bronze	BS 1400 LG2
4	Bonnet	Bronze	BS 1400 LG2
5	Disc Nut	Bronze	BS 1400 LG2
6	Body Seat Ring	S.S.	AISI 410
7	Handwheel	Aluminium	-
8	Gland	Bronze	BS 1400 LG2
9	Gland Packing	PTFE	-
10	Body	Bronze	BS 1400 LG2
11	Disc	S.S.	AISI 410

Dimensional Data

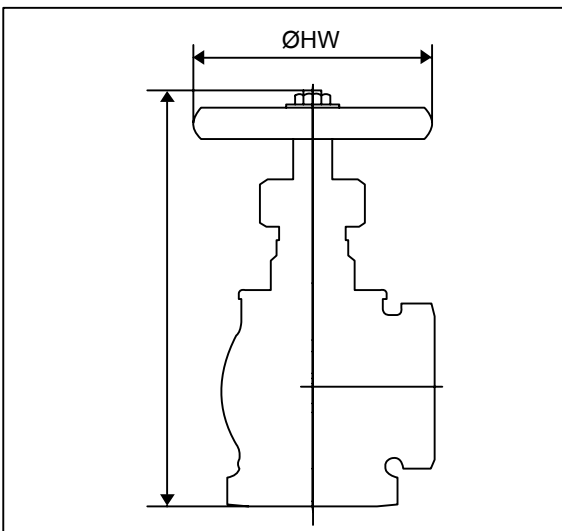

Nominal Size	H	ØHW
15	122	58
20	134	58
25	150	67
32	178	85
40	198	85
50	214	108