

Features

Specifications

Union Bonnet Ring, Threaded BSP ends

PN25

14 Bar (200PSI) Steam

28 Bar (400PSI) Water, Oil



Suitability

Water



Steam



Gas






Oil



Air




Material Combination

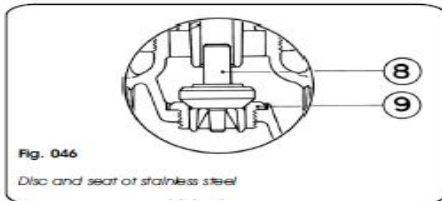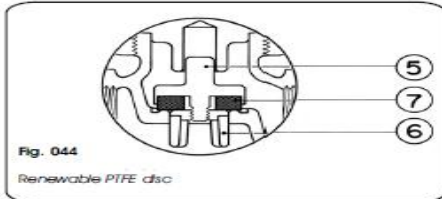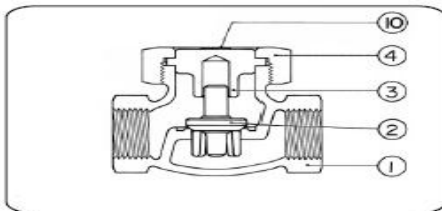

P/No.	Name of Part	Material	Specifications
1	Body	Bronze	B-61 Alloy C922
2	Metallic Disc	Bronze	B-61 Alloy C922
3	Bonnet	Bronze	B-61 Alloy C922
4	Union Bonnet Ring	Bronze	B-61 Alloy C922
5	Disc Holder	Bronze	B-62 Alloy C836
6	Disc Guide Nut	Bronze	B-61 Alloy C922
7	Renewable Disc	PTFE	-
8	Metallic Disc	Stainless Steel	A-276 Type 410
9	Seat Ring	Stainless Steel	A-276 Type 410
10	Identification Plate	Aluminium	-

Dimensional Data



* NPS: Nominal Pipe Size
** DN: Diámetro Nominal

Sizes		Weight	Dimensions	
NPS*	DN**	Kg	A	B
1/2	15	0,60	71	45
3/4	20	0,90	81	49
1	25	1,34	94	58
1 1/4	32	1,79	108	63
1 1/2	40	2,60	120	70
2	50	3,40	148	86